


LIGHTSOURCE

M-LED 3000 - HIGH INTENSITY LIGHTSOURCE

- PHASER® technology included
- Turret multi connector (optional)
- Low noise, low heat conduction
- Pure daylight quality

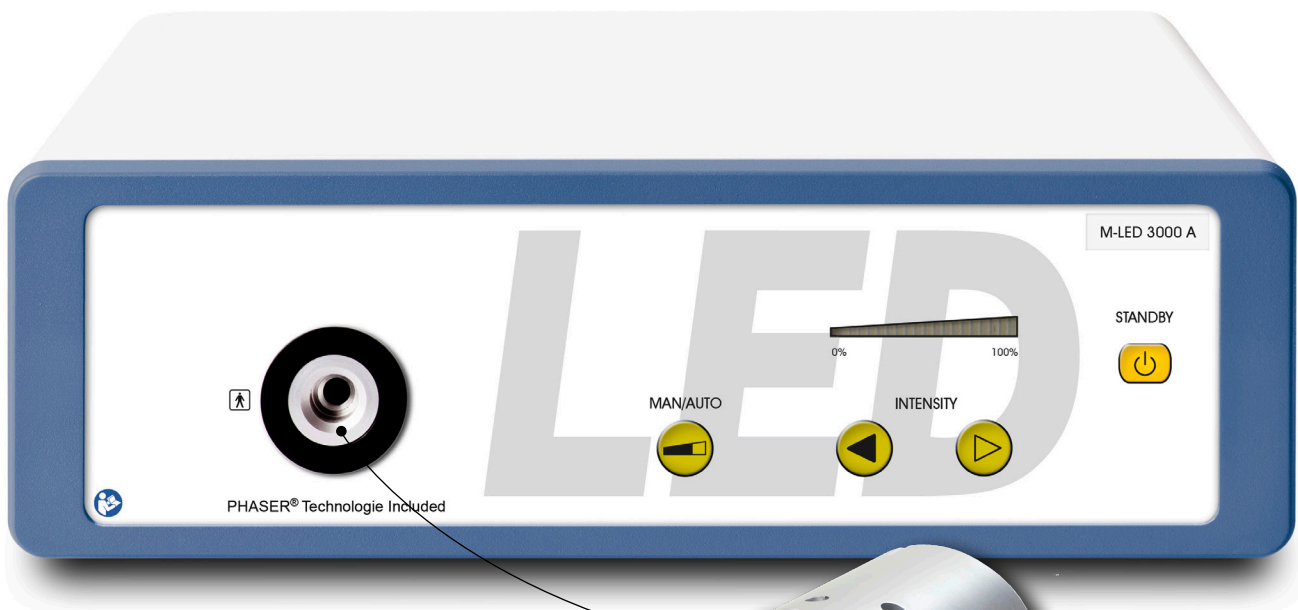

Multi connector option:
Wolf, Storz, Olympus, ACMI

LIGHTSOURCE

M-LED 3000 - HIGH INTENSITY LIGHTSOURCE

Series

Description

M-LED 3000	Storz adapter, automatic light intensity control
M-LED 3000	Wolf adapter, automatic light intensity control
M-LED 3000	Olympus adapter, automatic light intensity control
M-LED 3000 T	Turret adapter, automatic light intensity control

Technical Data

Light guide connection

• Storz, (standard connection):



• Turret, multi connector (optional):

Wolf



ACMI



Olympus



Storz

Ø max. 5,9mm



min. 4mm



Exclusively pictured version!

Lamp

• Daylight quality, 6000K (+/-500K)
• Lifetime: ≤30.000 hr

System

• Power supply: 100/240 VAC (+/- 10%), 47...63 Hz
• Fuses: 2 Fine fuses, 5x20 mm, delay 6,3 AT (I=1500A)
• Power consumption: max. 200 VA (+/- 10%)

Video In

• 1x Video (VBS)

Standard

• Protection class: I
• Application part: Type BF
• classification acc. 93/42/EEC: I
• EN ISO 13485 | 93/42/EEC | IEC 601-1, EN 60601-1C
• Class 1 laser product

Dimensions

• (WxHxD): 355 x 120 x 340 mm
• Weight: 10 kg

Delivery contains

• Light source, mains cable, user manual, BNC cable